



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number : **0 604 006 A2**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number : 93308546.6

(51) Int. Cl.<sup>5</sup> : **G02F 1/136**

(22) Date of filing : 27.10.93

(30) Priority : 27.10.92 JP 288039/92

(43) Date of publication of application :  
29.06.94 Bulletin 94/26

(84) Designated Contracting States :  
**DE FR GB**


(71) Applicant : **NEC CORPORATION**  
7-1, Shiba 5-chome  
Minato-ku  
Tokyo 108-01 (JP)

(72) Inventor : **Mikoshiha, Hiroaki**  
c/o NEC Corporation,  
7-1, Shiba 5-chome  
Minato-ku, Tokyo (JP)

(74) Representative : **Moir, Michael Christopher et al**  
**MATHYS & SQUIRE,**  
10 Fleet Street  
London EC4Y 1AY (GB)

(54) **Active matrix liquid crystal display cell.**

(57) In an active matrix liquid crystal display cell having a switching active element, first and second transparent electrodes between which liquid crystal is disposed, and a shading layer for protecting the switching active element and enhancing the visibility of the display, the shading layer is partially laid under the first transparent electrode and separated therefrom by an insulating layer interposed between the shading layer and the first transparent electrode.

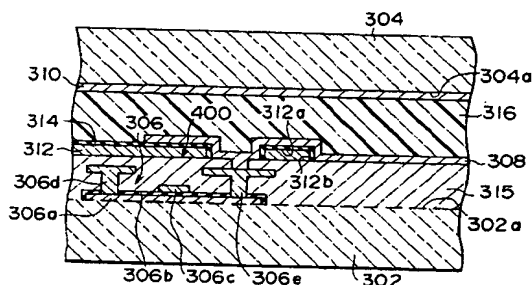

**FIG. 3B**

BEST AVAILABLE COPY

EP 0 604 006 A2

## Background of the Invention

The present invention relates to an active matrix liquid crystal display cell which serves to provide a single picture element, namely, a pixel, and an active matrix liquid crystal display panel comprising a plurality of the active matrix liquid crystal display cells arranged in a matrix fashion.

In the manner which will later be described more in detail, a conventional active matrix liquid crystal display cell of the type described comprises a switching active element for driving liquid crystal, a capacitance element which stores charge for driving the liquid crystal, a pair of transparent electrodes the space between which is filled with the liquid crystal, and a shading layer for protecting the switching active element and enhancing the contrast of the image.

It is a recent trend that each of the active matrix liquid crystal display cells becomes small in size so as to increase numbers thereof for getting an excellent resolution power of the active matrix liquid crystal display panel.

However, the conventional active matrix liquid crystal display panel cannot provide a bright image, due to a structure of each active matrix liquid crystal display cell, when the active matrix liquid crystal display cell is small in size.

## Summary of the Invention

It is therefore an object of at least the preferred embodiments of this invention to provide an active matrix liquid crystal display cell and a panel comprising a plurality thereof which can provide a bright image, even though the active matrix liquid crystal display cell is small in size.

Other objects of this invention will become clear as the description proceeds.

According to an aspect of this invention, there is provided an active matrix liquid crystal display cell, comprising:

a switching active element;

first and second transparent electrodes between which liquid crystal is disposed, said first transparent electrode being connected to said switching active element for driving said liquid crystal and said second transparent electrode being positioned opposite to said first transparent electrode;

a shading layer which is made of a conductive material, and is disposed partially under the first transparent electrode; and

an insulating layer which is interposed between said shading layer and said first transparent electrode.

"Under" is to be interpreted with respect to the cell when oriented such that the liquid crystal is above the first transparent electrode.

The shading layer may be made of aluminum and

the insulating layer may be formed by an anodic oxidation of the aluminum.

According to another aspect of this invention, there is provided an active matrix liquid crystal display panel comprising a plurality of active matrix liquid crystal display cells arranged in a matrix fashion, each of the active matrix liquid crystal display cells being as set forth above.

## Brief Description of the Drawings

The invention will be described merely by way of example with reference to the accompanying drawings, wherein:

Fig. 1 is a schematic vertical sectional view of a conventional active matrix liquid crystal display cell;

Fig. 2 is a block diagram of an active matrix liquid crystal display panel according to a first embodiment of this invention;

Fig. 3A is a plan view of an active matrix liquid crystal display cell according to a first embodiment of this invention.

Fig. 3B is a schematic vertical sectional view taken across A-B-C of the active matrix liquid crystal display cell illustrated in Fig. 3A;

Fig. 4 shows an equivalent circuit of the active matrix liquid crystal display cell illustrated in Figs. 3A and 3B;

Fig. 5 is a schematic vertical sectional view of a capacitance element of an active matrix liquid crystal display cell according to a second embodiment of this invention;

Fig. 6 is a schematic vertical sectional view of a capacitance element of an active matrix liquid crystal display cell according to a third embodiment of this invention;

Fig. 7 is a schematic vertical sectional view of a modification of the capacitance element illustrated in Fig. 6;

Fig. 8 is a schematic vertical sectional view of a capacitance element of an active matrix liquid crystal display cell according to a fourth embodiment of this invention;

Fig. 9A is a plan view of an active matrix liquid crystal display cell according to a fifth embodiment of this invention;

Fig. 9B is a schematic vertical sectional view taken across x-y of the active matrix liquid crystal display cell illustrated in Fig. 9A; and

Fig. 10 shows an equivalent circuit of the active matrix liquid display cell illustrated in Figs. 9A and 9B.

## Description of the Preferred Embodiments:

Referring to Fig. 1, a conventional active matrix liquid crystal display cell will first be described for a

better understanding of this invention.

In Fig. 1, the conventional active matrix liquid crystal display cell 100 comprises a principal glass substrate 102, an opposite glass substrate 104, a transparent pixel electrode 106 deposited at the side of the principal glass substrate 102, a transparent opposite electrode 108 formed under the whole area of the opposite glass substrate 104, and a liquid crystal 110 filling the space between the transparent pixel electrode 106 and the transparent opposite electrode 108, a switching active element 120, a capacitance element 130, and a shading layer 140.

The switching active element 120 is formed by a thin-film transistor (TFT) of a bottom gate type, which consists of a gate 121, a gate insulating layer 122, an amorphous silicon layer 123, a doped amorphous silicon layer 124, a drain 125, and a source 126. The gate 121 is connected to a gate bus (not shown) and the drain 125 is connected to a drain or signal bus (not shown), while the source 126 is connected to the transparent pixel electrode 106. The capacitance element 130 consists of the transparent pixel electrode 106, a transparent electrode 132, and a dielectric layer 134 which is defined by a portion of the gate insulating layer 122. The shading layer 140 is partially deposited under the transparent opposite electrode 108.

The liquid crystal 110 also fills the space between the switching active element 220 and the shading layer 140, as illustrated in Fig. 1. In the active matrix liquid crystal display cell 100, the transparent pixel electrode 106, the transparent electrode 132 and the transparent opposite electrode 108 are formed from ITO (Indium Tin Oxide) layer.

As mentioned in the preamble of the instant specification, a plurality of the active matrix liquid crystal display cells 100 are arranged in a matrix fashion to form an active matrix liquid crystal display panel (not shown).

In order to increase the number of active matrix liquid crystal display cells 100 to improve the resolution of the active matrix liquid crystal display panel, each active matrix liquid crystal display cell 100 is sometimes decreased in size to 50 x 50 micron meters.

In such a case, two problems arise in the conventional active matrix liquid crystal display cell 100.

First, since the shading layer 140 is deposited at the side of the opposite glass substrate 104, the shading layer 140 must be fully expanded to cover the whole area of the switching active element 120 and an edge portion of the transparent pixel electrode 106 in order to completely protect the switching active element 120 from light and to prevent a leak of light around the transparent electrode 132.

However, an allowance of about 10 micron meters is generally required when the opposite glass substrate 104 is positioned to be fitted to the principal

glass substrate 102. Further, an overlap of approximately 5 micron meters is required between the transparent electrode 132 and the shading layer 140. Accordingly, an allowance of about 15 micron meters is required at each side of the active matrix liquid crystal display cell 100. Thus a total allowance of 30 micron meters is required at both sides of the active matrix liquid crystal display cell 100, so in the case of a cell of 50 x 50 micron meters the effective pixel portion is only 20 x 20 micron meters. Thus, it is difficult to utilize light efficiency.

Second, there is a problem because the capacitance element 130 is formed by the transparent pixel electrode 106 and the transparent electrode 132 both of which are made of ITO and between which the dielectric layer 134 is interposed. Since the transmittance of the each ITO layer is about 90%, the overall transmittance is about 80% when light is transmitted through the transparent pixel electrode 106 as well as the transparent opposite electrode 108. Furthermore, since the transparent electrode 132 has a poor conductivity, it is necessary that the gate 121 is connected to wiring (not shown) having low resistance. If the width of the gate 121 is 5 micron meters, the above-mentioned effective pixel portion further reduces to 15 x 20 micron meters.

Thus, in the conventional active matrix liquid crystal display cell 100, it is difficult to utilize light efficiently, when the cell 100 is a minute size. As a result, an active matrix liquid crystal display panel which comprises a plurality of the cells 100 cannot provide a bright image.

Referring now to Figs. 2, 3A and 3B, there is described an active matrix liquid crystal display cell and an active matrix liquid crystal display panel comprising a plurality of the active matrix liquid crystal display cells according to a first embodiment of this invention.

In Fig. 2, an active matrix liquid crystal display panel 200 comprises a plurality of active matrix liquid crystal display cells 30 which are arranged in a matrix fashion, signal buses 150, and gate buses 152.

As illustrated in Figs. 3A and 3B, each of the active matrix liquid crystal display cells 300 comprises a principal transparent glass substrate 302 having a principal surface 302a directed upwards of Fig. 3B, an opposite transparent glass substrate 304 having a lower surface 304a directed downwards of Fig. 3B, a thin-film transistor (TFT) 306 of top-gate type which is formed on the principal surface 302a, a first transparent electrode 308 connected to the TFT 306 for driving liquid crystal, a second transparent electrode 310 which is formed on the lower surface 304a and which is positioned opposite to the first transparent electrode 308, a shading layer 312 which is made of aluminum, and an insulating layer 314 which is formed by an anodic oxidation of aluminum. The shading layer 312 may alternatively be made of the



which is a shading layer 312A of aluminum and another of which is a shading layer 312B of tantalum overlaid on the shading layer 312A.

The shading layer 312B of tantalum is readily oxidized by the anodic oxidation to have an insulating layer 320 of  $Ta_2O_5$  which has a high dielectric constant. Accordingly, another insulating layer 321 of aluminum is formed on the side surfaces of the shading layer 312A.

In this embodiment, it becomes possible greatly to improve the storage capacitance compared with the above-mentioned first, second, and third embodiments. In this example, the insulating layer 321 of aluminum is used to enhance a shading effect.

Referring to Figs. 9A and 9B, there is described an active matrix liquid crystal display cell according to a fifth embodiment of this invention.

The active matrix liquid crystal display cell according to the fifth embodiment has a structure similar to that of the first embodiment except that the active matrix liquid crystal display cell further comprises an additional capacitance element.

As illustrated in Figs. 9A and 9B, the active matrix liquid crystal display cell 300' according to the fifth embodiment further comprises the additional capacitance element 330 which is positioned under the overlapping section of the first transparent electrode 308 and the shading layer 312 through an insulating layer 314. The additional capacitance element 330 is defined by a polycrystalline silicon layer 330a, a gate insulating layer 330b, and a gate 330c. The gate 330c is electrically connected to the gate buses 152. The polycrystalline silicon layer 330a is connected to the polycrystalline silicon layer 306a.

In order to fabricate the polycrystalline silicon layer 330a, a polycrystalline silicon lamina is, at first, formed on the principal transparent glass substrate 302. The polycrystalline silicon lamina is then patterned to a predetermined shape to form a patterned polycrystalline silicon layer. Second, the gate insulating layer 330b is deposited on the patterned polycrystalline silicon layer. Thereafter, a section of the patterned polycrystalline silicon layer overlaid by the gate 330c is doped by an ion implantation method to form the polycrystalline silicon layer 330a.

In this embodiment, the additional capacitance element 330 is positioned under the overlapping section of the first transparent electrode 308 and the shading layer 312 through which light cannot pass originally. Accordingly, the additional capacitance element 330 makes it possible that the storage capacitance is greatly improved without reducing the efficient use of the light.

As symbolized in Fig. 10, the additional capacitance element 330 is also formed in parallel to the two capacitance elements 400 and 410 which were mentioned in respect of the first embodiment, as symbolized in Fig. 4. The additional capacitance element 330

is connected between the source 306e of a transistor  $Q_1$  and the gate 306c of a transistor  $Q_2$  as symbolized in Fig. 10.

A TFT generally cannot avoid a leakage current between 0.1 pA and 1.0 pA. It is therefore desired that the storage capacitance is large enough to store a signal voltage without reduction while the active matrix liquid crystal display cell is scanned.

When the active matrix liquid crystal display cell having such a TFT is small, in other words, is decreased in size into, for example 50 x 50 micron meters, the storage capacitance by the two capacitance elements 400 and 410 is 100 pF, at the most. The capacitance of 100 pF is not enough to store the signal voltage, as mentioned above, in view of the aforesaid leakage current of the TFT. Accordingly, it is very advantageous that the active matrix liquid crystal display cell 300' according to this embodiment comprises the additional capacitance element 330.

While this invention has thus far been described in conjunction with only several embodiments thereof, it will readily be possible for those skilled in the art to put this invention into practice in various other manners within the scope of the appended claims.

## Claims


1. An active matrix liquid crystal display cell, comprising:
  - a switching active element;
  - first and second transparent electrodes between which liquid crystal is disposed, said first transparent electrode being connected to said switching active element for driving said liquid crystal and said second transparent electrode being positioned opposite to said first transparent electrode;
  - a shading layer which is made of a conductive material, and is disposed partially under the first transparent electrode; and
  - an insulating layer which is interposed between said shading layer and said first transparent electrode.
2. An active matrix liquid crystal display cell as claimed in Claim 1, wherein a capacitance element is defined by said shading layer, said first transparent electrode, and said insulating layer interposed therebetween.
3. An active matrix liquid crystal display cell as claimed in Claim 2, further comprising an additional capacitance element positioned under said shading layer and separated therefrom by an insulating layer; said additional capacitance element being defined by a polycrystalline silicon, a gate insulating layer and a gate.

4. An active matrix liquid crystal display cell as claimed in Claim 1, wherein said shading layer is made of aluminum and said insulating layer is formed by an anodic oxidation of said aluminum. 5
5. An active matrix liquid crystal display cell as claimed in Claim 1, wherein said shading layer comprises tantalum and said insulating layer comprises a layer formed by an anodic oxidation of said tantalum. 10
6. An active matrix liquid crystal display cell as claimed in Claim 1, wherein said insulating layer comprises at least two stacked layers. 15
7. An active matrix liquid crystal display cell as claimed in Claim 6, wherein at least one of said stacked layers is formed by an anodic oxidation of said shading layer. 20
8. An active matrix liquid crystal display cell as claimed in Claim 3, wherein said shading layer is made of aluminum and said insulating layer is formed by an anodic oxidation of said aluminum. 25
9. An active matrix liquid crystal display cell as claimed in Claim 3, wherein said shading layer comprises tantalum and said insulating layer comprises a layer formed by an anodic oxidation of said tantalum. 30
10. An active matrix liquid crystal display cell as claimed in Claim 3, wherein said insulating layer comprises at least two stacked layers. 35
11. An active matrix liquid crystal display cell as claimed in Claim 10, wherein at least one of said stacked layers is formed by an anodic oxidation of said shading layer. 40
12. An active matrix liquid crystal display panel comprising a plurality of active matrix liquid crystal display cells arranged in a matrix fashion, each of said active matrix liquid crystal display cells being as claimed in any one of the preceding claims. 45


50

55

6

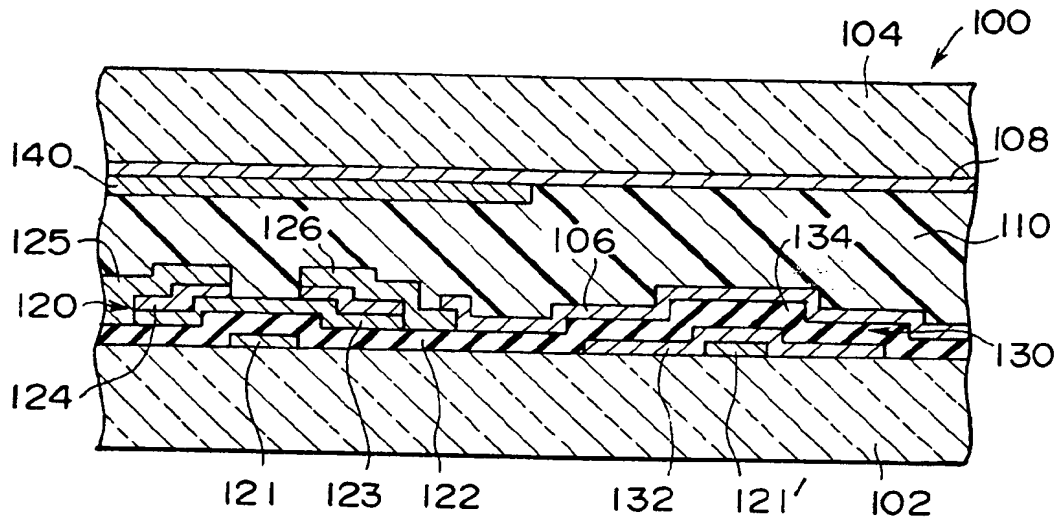

**FIG. 1**  
PRIOR ART

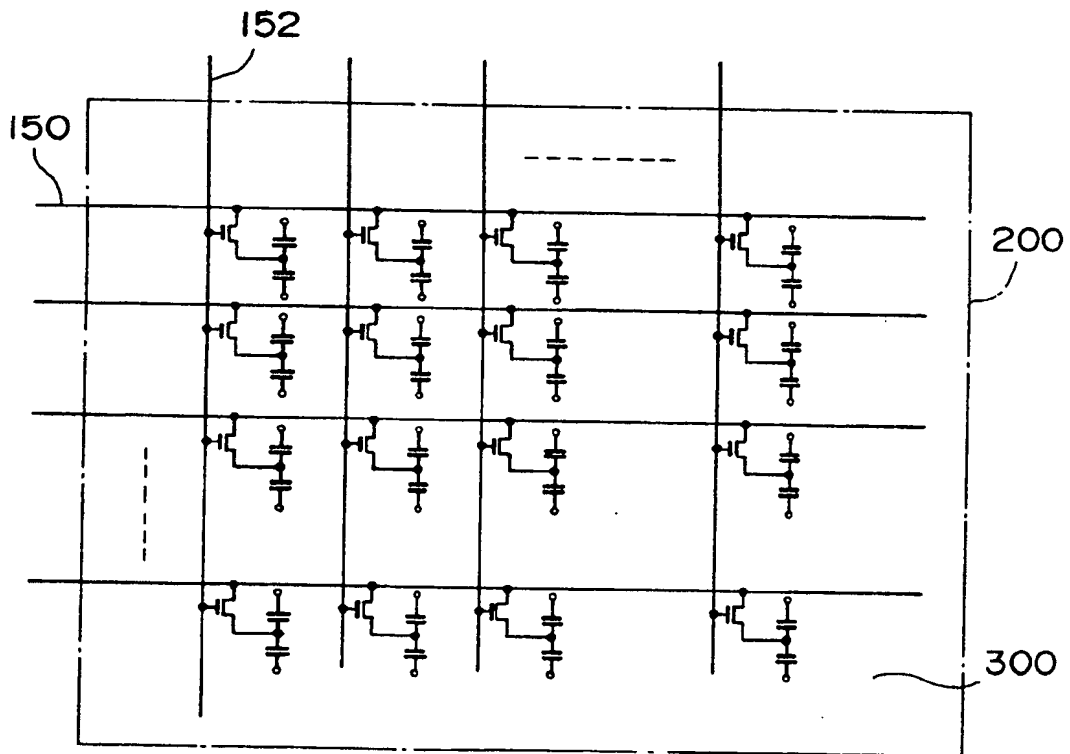

**FIG. 2**

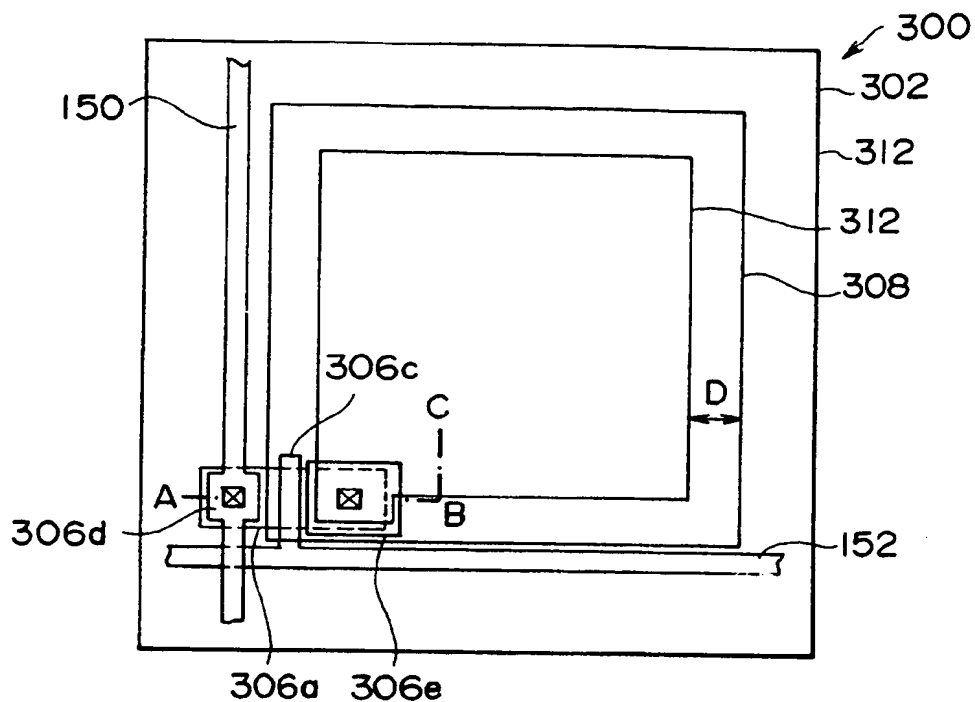


FIG. 3A

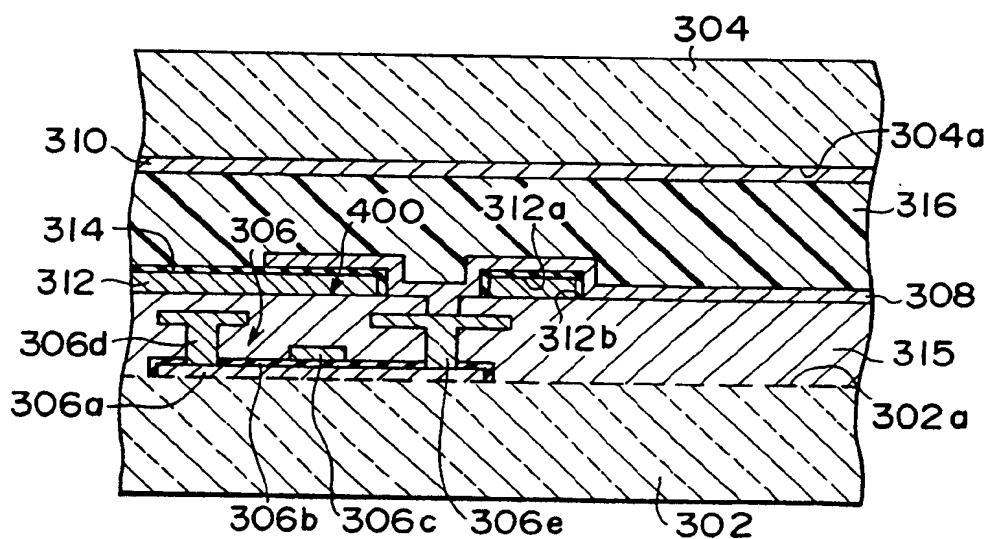


FIG. 3B



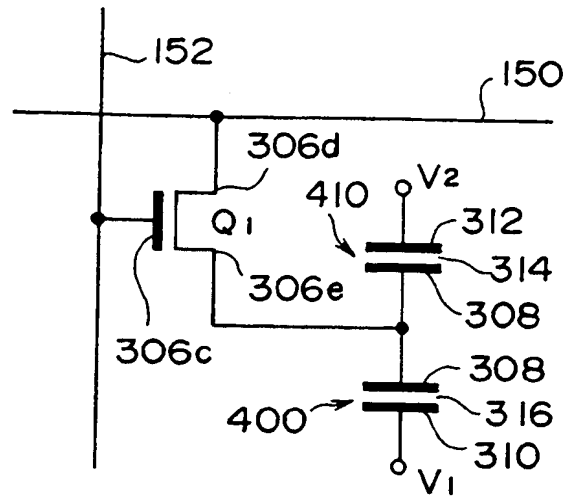


FIG. 4

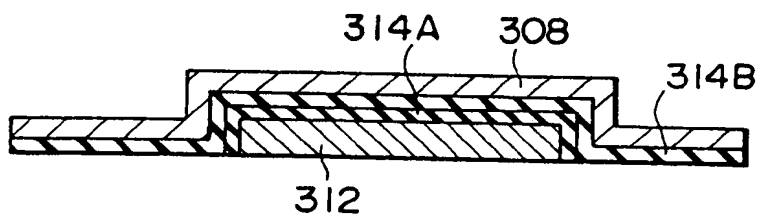


FIG. 5

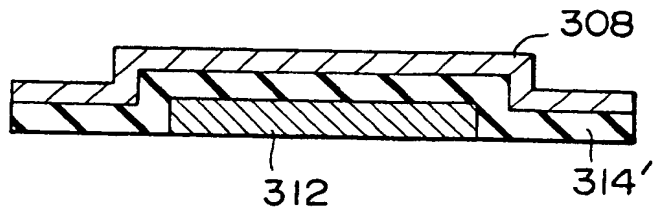


FIG. 6

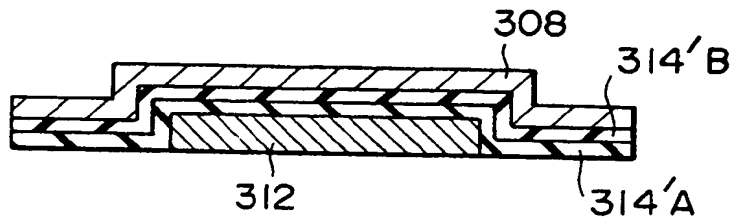


FIG. 7

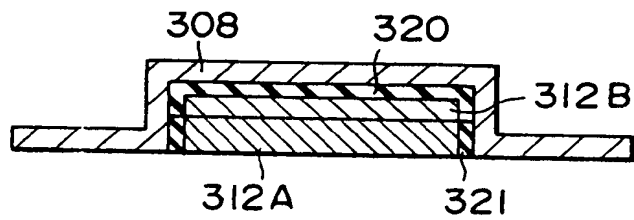


FIG. 8

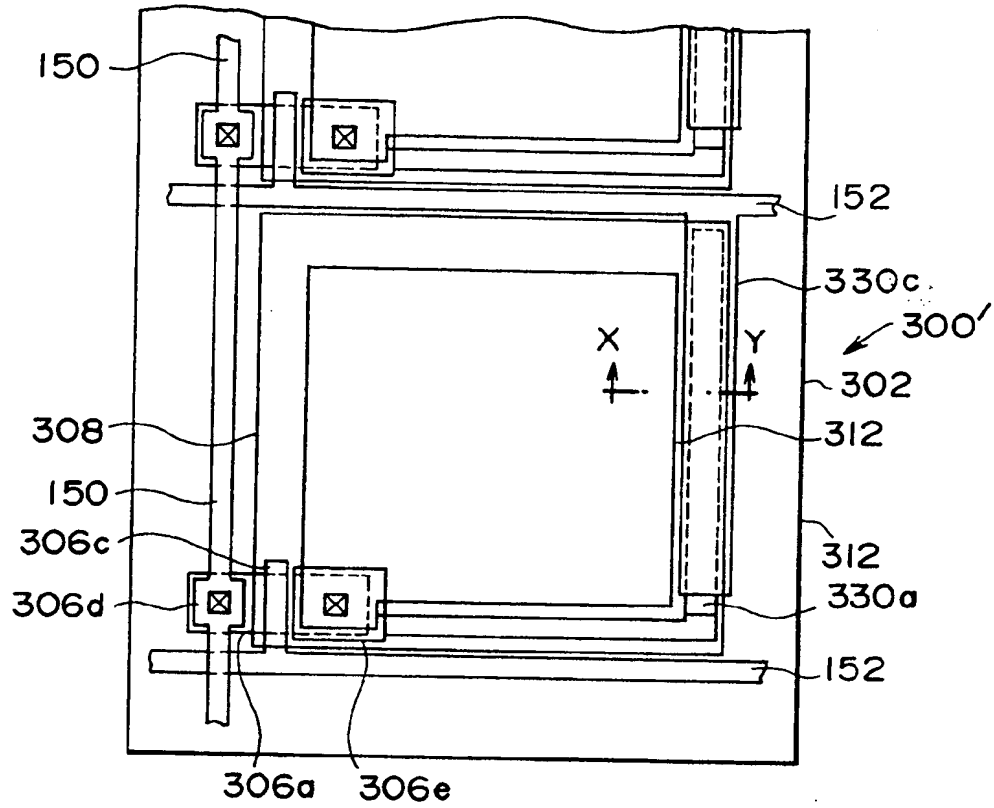


FIG. 9A

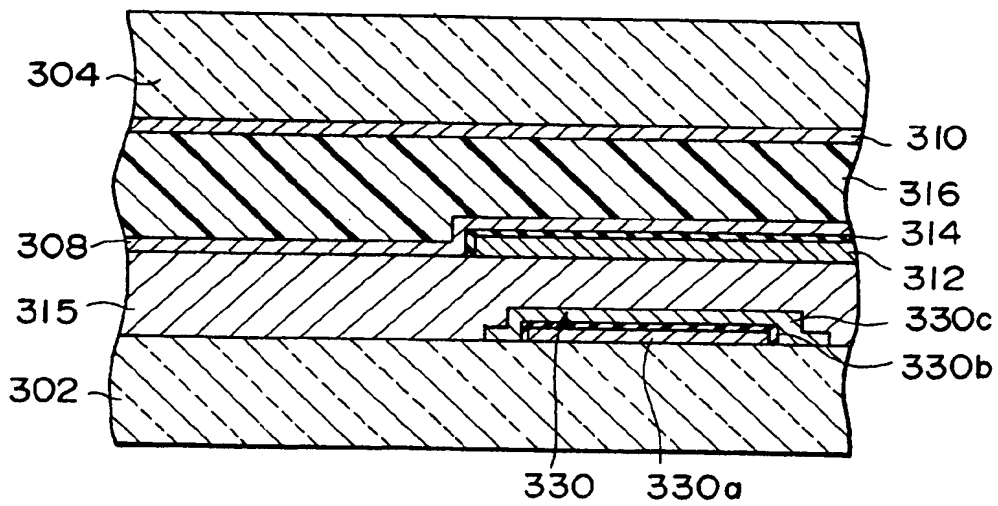


FIG. 9B





⑪ Publication number: **0 604 006 A3**

⑫

## EUROPEAN PATENT APPLICATION

⑰ Application number: **93308546.6**

⑸ Int. Cl.<sup>5</sup>: **G02F 1/136**

⑱ Date of filing: **27.10.93**

⑳ Priority: **27.10.92 JP 288039/92**

㉑ Date of publication of application:  
**29.06.94 Bulletin 94/26**

㉒ Designated Contracting States:  
**DE FR GB**

㉓ Date of deferred publication of search report:  
**23.11.94 Bulletin 94/47**


㉔ Applicant: **NEC CORPORATION**  
**7-1, Shiba 5-chome**  
**Minato-ku**  
**Tokyo (JP)**

㉕ Inventor: **Mikoshihira, Hiroaki**  
**c/o NEC Corporation,**  
**7-1, Shiba 5-chome**  
**Minato-ku, Tokyo (JP)**

㉖ Representative: **Moir, Michael Christopher et al**  
**MATHYS & SQUIRE,**  
**10 Fleet Street**  
**London EC4Y 1AY (GB)**

⑤4 Active matrix liquid crystal display cell.

⑤7 In an active matrix liquid crystal display cell having a switching active element (306), first (308) and second (310) transparent electrodes between which liquid crystal (316) is disposed, and a shading layer (312) for protecting the switching active element and enhancing the visibility of the display, the shading layer is partially laid under the first transparent electrode and separated therefrom by an insulating layer (314) interposed between the shading layer and the first transparent electrode.

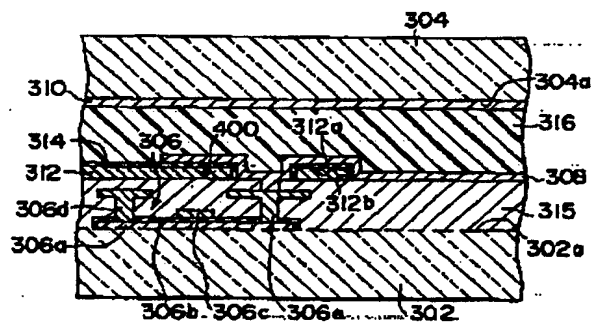

**FIG. 3B**

**EP 0 604 006 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 93 30 8546

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.5)
X	EP-A-0 136 509 (TOSHIBA) * page 5, line 25 - page 6, line 17; figure 7 *	1,2	G02F1/136
A	US-A-5 132 820 (HITACHI) * figure 15B; example IV *	1-3	
A	EP-A-0 434 161 (PHILIPS) * column 5, paragraph 1 - paragraph 2; figure 3 *	1,3	
A	EP-A-0 376 437 (SHARP) * column 5, paragraph 3 - column 6, paragraph 2; figure 1 *	1,4-7	
A	EP-A-0 464 579 (NEC) * claim 1; figures 3,4 *	1,3	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.5)
			G02F
Place of search		Date of completion of the search	Examiner
THE HAGUE		26 September 1994	Wongel, H
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 150 (11.94) (P.04001)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**